

Riva Yamaha Honda.com Call Toll Free: 1-877-RIVA YAM International: 954-785-4820

HOME CONTACT

WATERCRAFT ▾ ATV ▾ MOTORCYCLES ▾ GO-PEDS ▾ RACING ▾ ORIGINAL PARTS FIND



[Post New Topic](#) [Post Reply](#)

[my profile](#) | [register](#) | [search](#) | [faq](#) | [forum home](#)

[Previous](#) [Next](#)

[Riva Performance Forum](#) » [Yamaha PWC Performance Forum](#)

» You are not logged in. [Login](#) or [register](#)

tamper caps remov

Author

Topic: Carb tamper caps removal pics


Fercho



posted 08-31-2001 01:51 AM




Member
Member
25

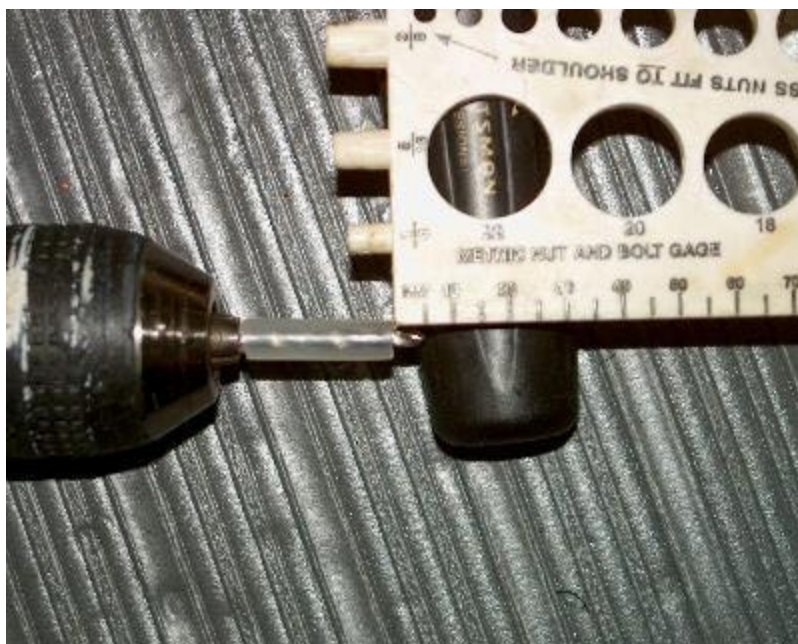


1/8 drill bit with spacer made from cheap pen, leave 5 mm exposed on bit.



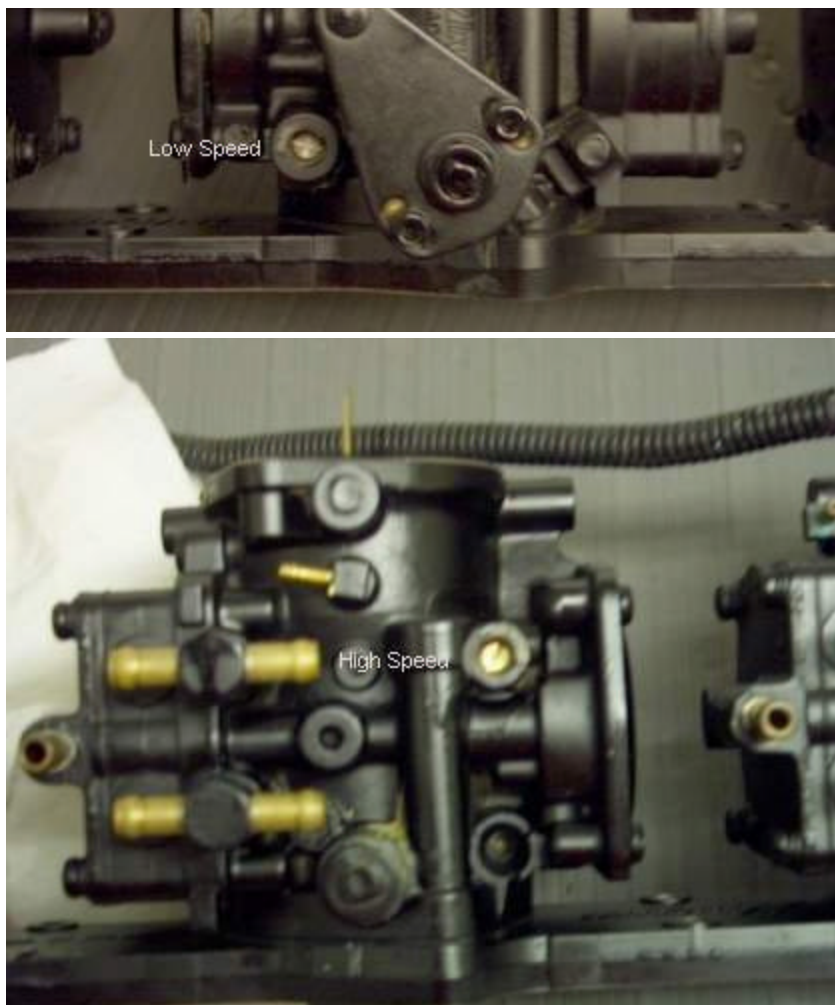

The caps to be drilled are to the right of the Low Speed & High Speed labels.

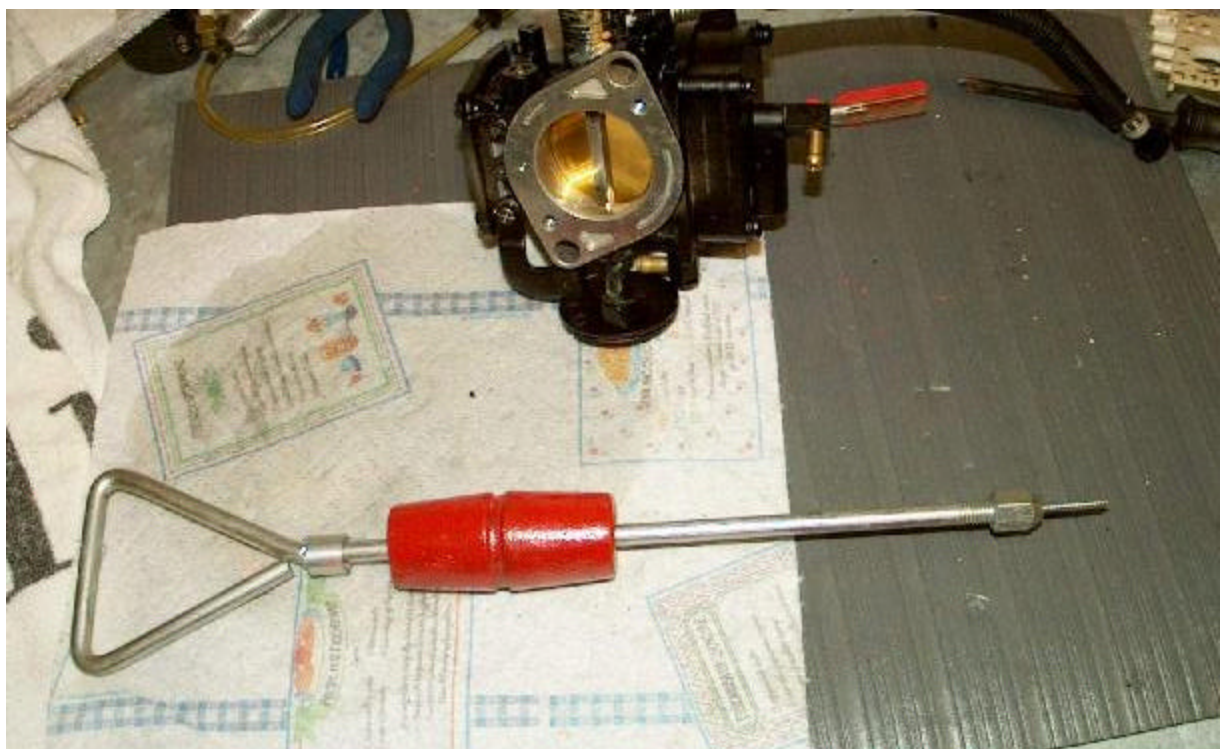



Basic dent puller. Do not use dent puller screws instead get a #8 screw and if the head of screw is to big for puller, grind the head down. #8 screw fits the 1/8 hole drilled. Insert sc and turn 1-1 1/2 turns.





[03-30-2002: Message edited by: Fercho]